



**Snom D710/D715 Instructions**

**1. Making Calls**


i. Outside Calls

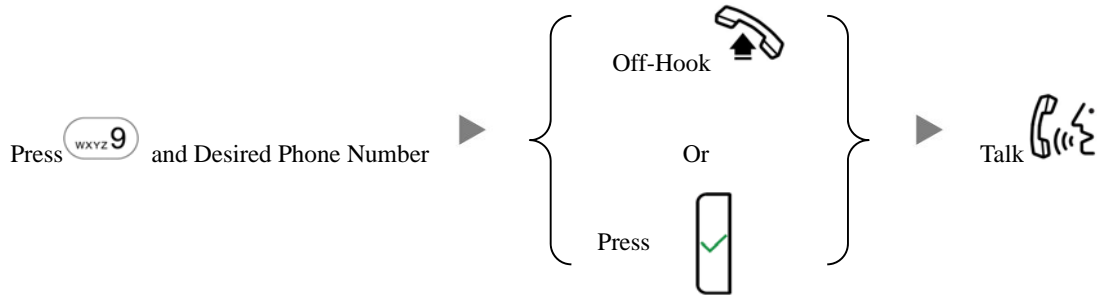


ii. Calling Other Extension

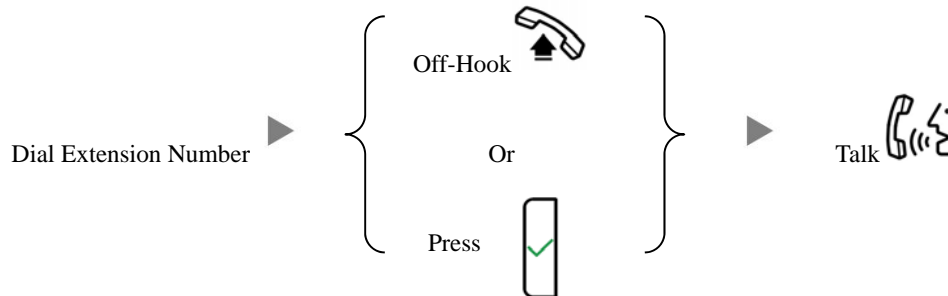

iii. Redial

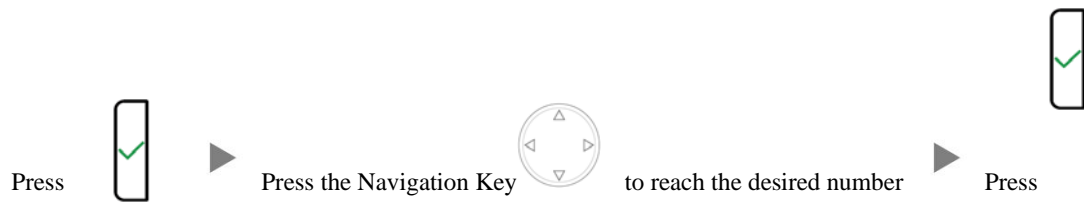

**2. Answering Calls**

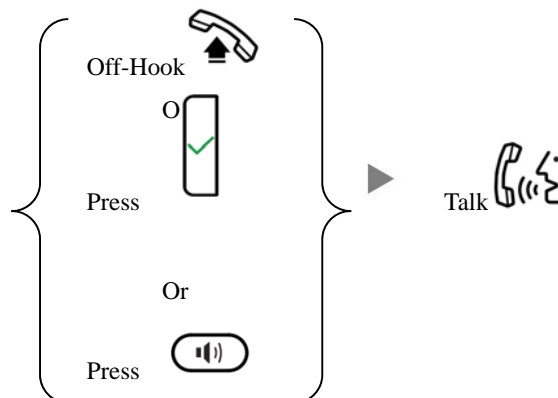


### 3. Transferring a Call / Call Transfer

#### i. Blind / Unattended Transfer



#### ii. Supervised / Attended Transfer




### 4. Holding a Call

#### i. To Hold




#### ii. To Retrieve a call (Call Hold retrieve)

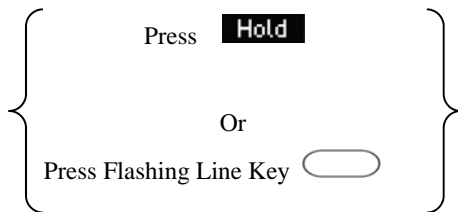


### 5. Making a conference (Conference Call)


#### i. To Establish a Conference



#### ii. To Leave a conference and talk to the original person

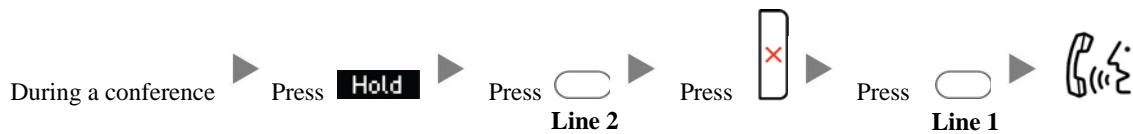


#### iii. To Leave a conference and talk to the 3<sup>rd</sup> person

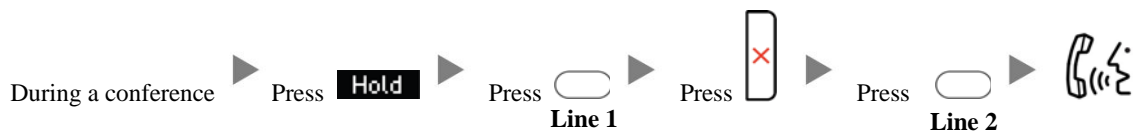


#### iv. To Leave a conference




6. Checking Voice Mail

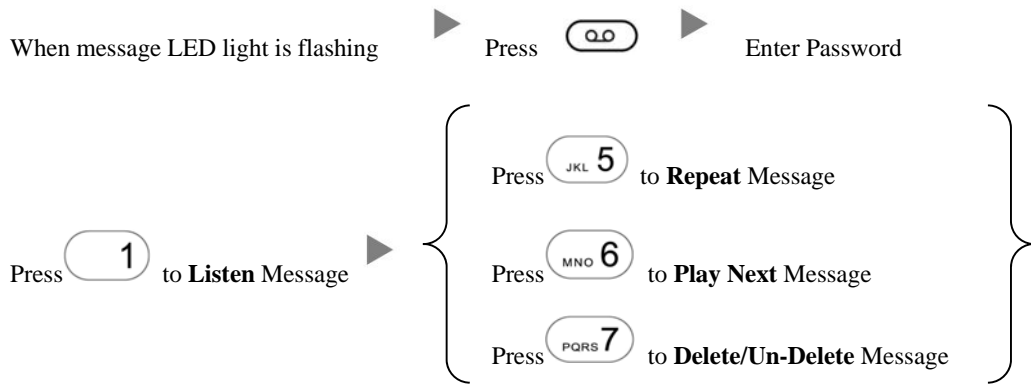

7. Voice Mail Setup

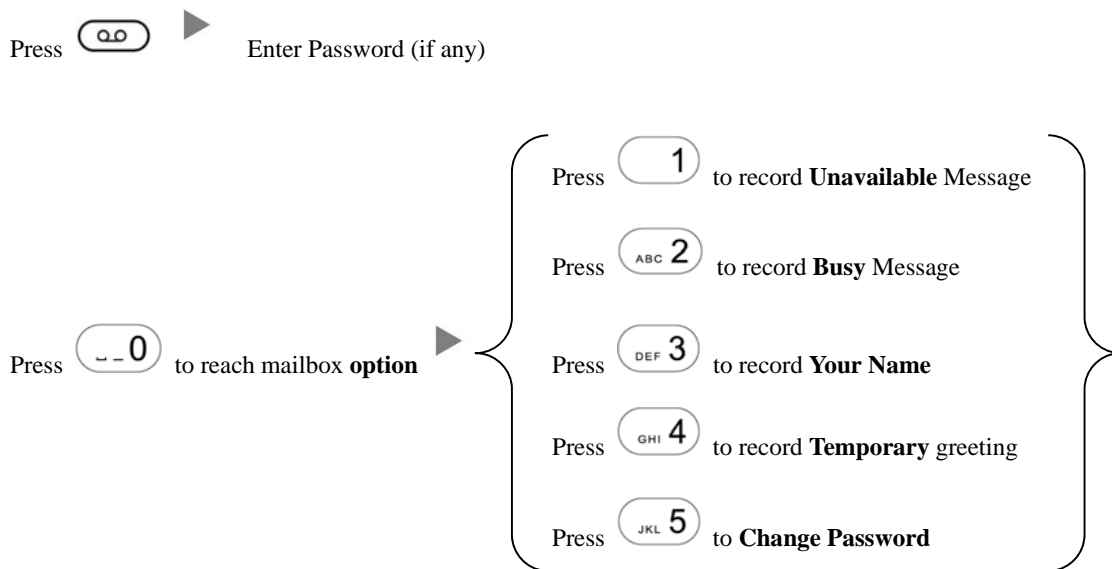


8. Checking Call History

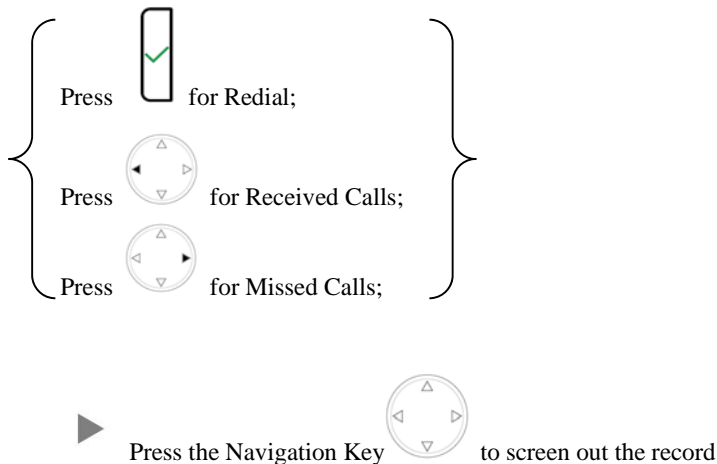


## 9. Forward Call

### i. To set up All Call Forward Mode

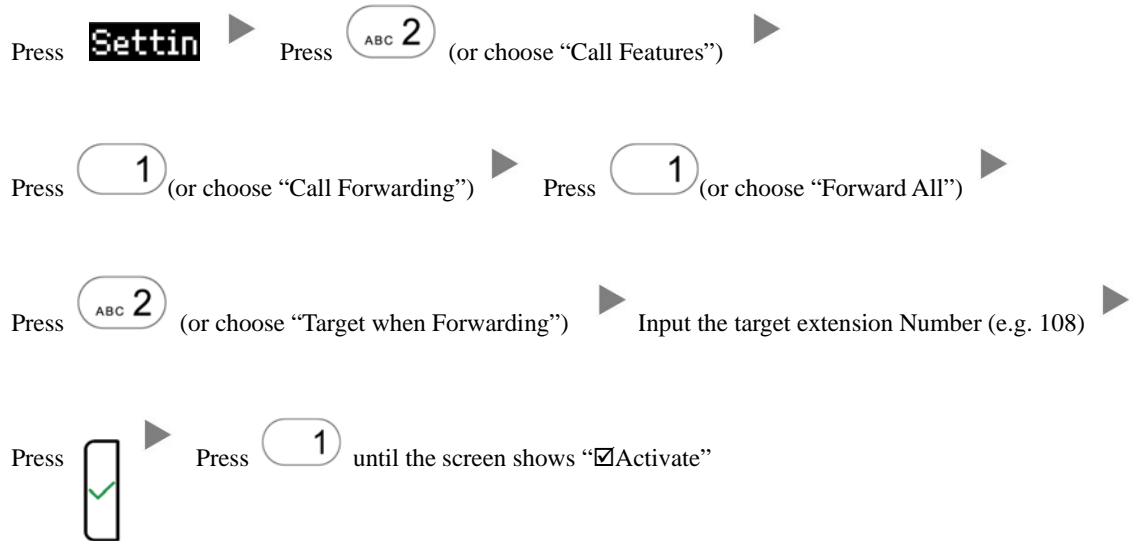

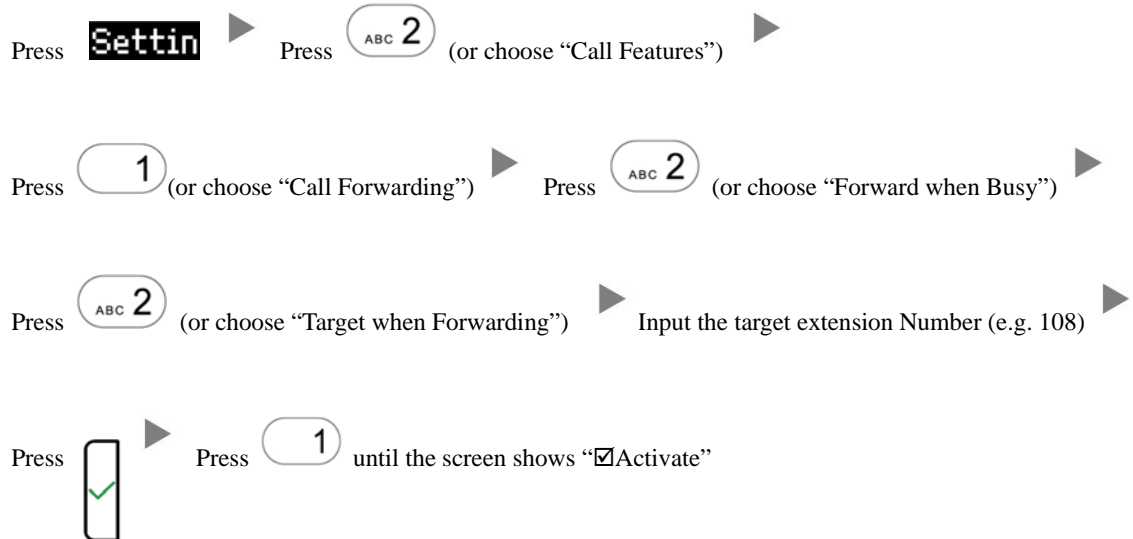

### ii. To set up Busy Call Forward Mode






iii. To set up Time / No Answer Call Forward Mode

Press **Settin** ▶ Press  (or choose “Call Features”) ▶

Press  (or choose “Call Forwarding”) ▶ Press  (or choose “Forward after Timeout”) ▶

Press  (or choose “Call Forwarding Time”) ▶ Input the No Answer Time (e.g. 20 seconds) ▶ 


Press  (or choose “Target for Forwarding”) ▶ Input the target extension Number (e.g. 108) ▶

Press  ▶ Press  until the screen shows “Activate”

iv. To Cancel Call Forward

Press **Settin** ▶ Press  (or choose “Call Features”) ▶

Press  (or choose “Call Forwarding”) ▶ Choose the Forwarding mode to be canceled ▶

Press  until the screen shows “Activate”

10. Address Book

Press **Dir** ▶ Press the Navigation Key  to select the Address ▶ Press 